

BASICCHARGE:EV SUPERFAST

FREE-TO-USE

Type 2, Mode 3 Charging Socket(s)
11kW or 22kW

my
EVCP
Installations

MANUFACTURED IN THE UK



The BASICCHARGE:EV SUPERFAST pedestal replicates Rolec's world-leading Classic utility pedestal, which now boasts over 150,000 units sold worldwide.

This mass produced, tried and tested pedestal is both, an affordable and adaptable EV charging solution. Suitable for a variety of different locations, including: private car parks, offices, factories, hotels, cinemas, leisure centres, shops, warehouses, hospitals, schools, depots - in fact any moderately secure environment.

Available in either 1way or 2way versions, providing Mode 3 superfast charging in 11kW or 22kW speeds.

Unit shown: BASICCHARGE:EV SUPERFAST
2way Socket (Type 2) Charging Pedestal

PRODUCT FEATURES

- Mode 3 (IEC 61851-1) superfast charging
- Available in 1way & 2way versions
- 11kW (16A) & 22kW (32A) charging speeds
- Type 2 (IEC 62196) 3 phase charging socket(s) c/w security hatchlock(s)
- Photocell controlled LED amenity lighting head
- Surface or roof mountable
- Built-in AC overload and fault current protection
- Built-in DC sensitive protection
- Built-in LED charging status indicator socket halo(s)
- Easy to install & maintain
- IP rated
- UV stabilised
- Corrosion resistant



Free
To Use



Superfast
3 Phase Charging



Branding & Colour
Options Available



LED Amenity
Lighting






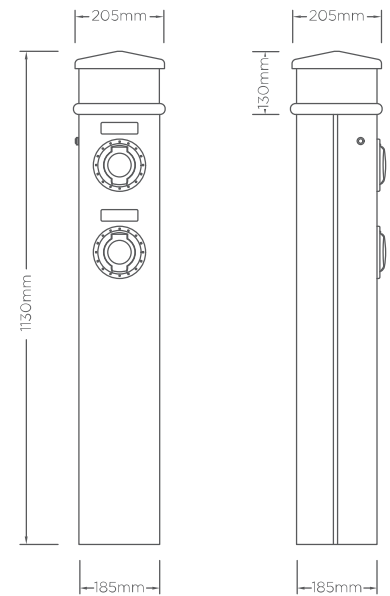
IP Rated &
UV Stabilised



CE
Certified

SPECIFICATIONS

Product Code	EVCL2007	EVCL2008	EVCL2017	EVCL2018
Charging Socket(s)	1x Type 2 (IEC 62196) 		2x Type 2 (IEC 62196) 	
Rated Output	11kW	22kW	11kW	22kW
Rated Current	16A	32A	16A	32A
Charge Protocol	Mode 3			
Input Voltage	400V AC/50Hz (3 Phase)			
AC Overload Protection	1x 20A	1x 40A	2x 20A	2x 40A
AC Fault Protection	30mA			
DC Fault Protection	6mA			
Cable Terminals	5x 50mm			
Standby Consumption	Approx 0.3kW per day			
Certifications & Compliances	EV Charging Compliance – EN 61851-1:2001, EN 61851-21:2002, EN 61851-22:2002			
	Wiring Regulations – BS 7671			
	EMC Compliance – EN 61000-6-3:2007, EN 61000-6-2:2005			
	Safety Compliance (LVD) – 2014/35/EU			
	Environmental Protection – Enclosure IP65, Socket IP54 (BS EN 60529:1992+A2:2013)			
				
Dimensions	205mm x 1130mm x 205mm (W x H x D)			
Pedestal Material	High impact resistant aluminium composite outer shell			
Internal Chassis	Heavy duty, hot dipped galvanised steel			
Operating Temperature	-30°C to +50°C			
Standard Body Colour	Black (Other colours available upon request)			



Optional ground mounting base

OPTIONS & ACCESSORIES

- Key switch control charging
- Available with powder coated aluminium outer shell
- Available with powder coated stainless steel outer shell
- IP65 protected 13A domestic socket (Mode 2 charging or maintenance)
- Built-in class 1 MID compliant kWh meter
- Built-in time clock providing charge time management
- Corporate branding (colours, logo badge, etc.)
- Galvanised steel ground mounting base
- Protection barriers
- Charge point signage
- 3 phase EV charging cables (Type 2 to Type 2)

Images are for marketing purposes only and are not contractual © 2020